




MATERIAL

- High density polyethylene (HDPE)
- Thermo-molded
- Built-in UV treated
- Available in two colours
- Fire-retardant versions available Class C & A/M1
- Made in Canada

DIMENSIONS

- 100 cm x 45 cm / 39" x 18"
- Thickness: 0.7 mm / 0.029"
- Weight: 300 gr/leaf / 0,67 lbs/leaf

Dijon

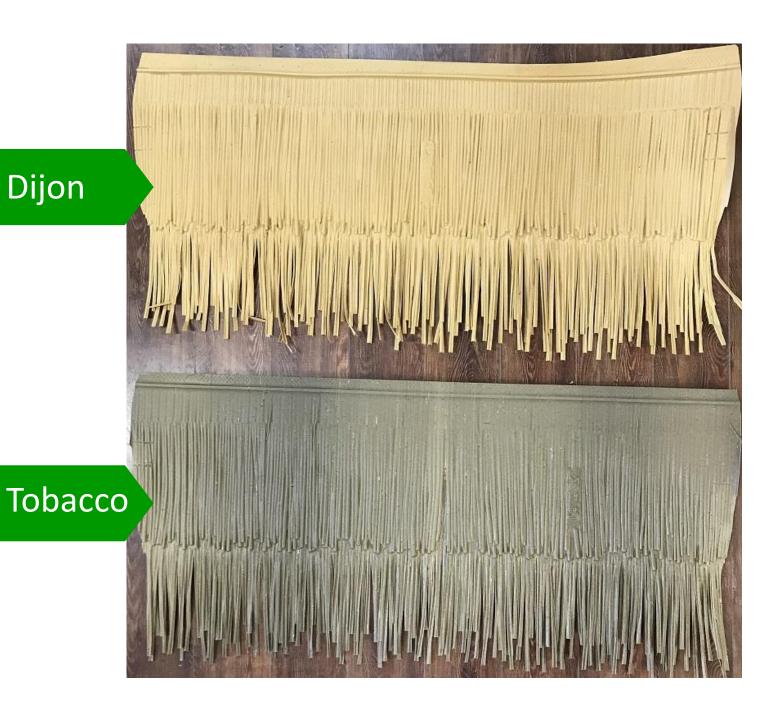

AFORIKA Spec sheet



CERTIFICATIONS

- 20-year warranty
- 100% waterproof
- Wind resistant: ASTM D3161260 km/h / 160 mph
- UV-resistant: ASTM G26
- M1 fire-retardant certified
- o ISO 9001
- Vertima-certified to contribute to LEED credits
- 100% recyclable

100 cm / 39"



INSTALLATION

- To be laid on wood panels, metal sheeting or various shingles
- Installation on horizontal battens that are fixed to the roof rafters (leaves visible from underneath the roof)

Overlap the leaves bricklaying-style starting from bottom up to the top.

First row to be fixed at 20 cm (8") from the bottom. All other row to be fixed at 12.5 cm (4 15/16")

Additional rows of leaves can be fixed at the first row to create thickness at the bottom of the roof.

PACKAGING

- Bundles of 72 leaves
- 0 100 cm L x 51 cm l x 13 cm H x 22 kg 39" L x 20" W x 5" H x 49 lbs
- 9 sqm / 97 sq. ft. coverage for one bundle



Recommended:

For a better wind resistance, an additional row of nails/staples/screws can be added a few inches from the top of each leaf, forming a quincunx with the first row of nails/staples/screws.

